

Operating Instructions Flow monitor Type BFS-40 N and Flow monitor Type BFS-40-O

1. Installation

Operating of the BFS-40 N/L flow monitors and indicators is based on the movement of a spring-loaded piston within a cylindrical tube. The instrument can be mounted in any position in a system. Flow direction is from the lowest to the highest value, indicated on the scale.

The flow media must be free of particle contamination, otherwise the instruments will not function properly. Particularly magnetic particles may cause faults. We recommend the use of dirt filters or magnetic filters. All non standard applications should be discussed with our technical engineers.

The flow monitors must not be positioned in inductive or magnetic fields. Minimum distance from iron parts: 10 mm.

All connection sizes comply with the R-standard (DIN 2999, part 1). Only suitable thread and sealing material should be used for installation, otherwise the correct function of the equipment may be affected.

To avoid the risk of measure faults, the upstream line should be 10 x D and the downstream line 5 x D (where D = internal diameter of the tube).

The highest accuracy will be reached by mounting the flow monitors vertically, with flow direction from bottom to the top.


**When screwing the fittings, take care of the max. length of the threads.
Too long threads may cause damage of the flow monitor.**

**(BFS-40-O:
When screwing the fittings, the flowmeter threads must be fixed with a spanner. Never rotate the flowmeter connections inside the aluminum sleeve. This may cause leakage or breaking of the glass.)**

All model provided with a switch should be protected from electrical overload. Never exceed the given maximum switch capacity, not even for short periods. The embedded reedswitch is very sensitive for specifically inductive loads, which may occur at closing or opening and which can up to 10 times the given nominal value of the coil. Use protecting relays or other precautions in such cases.

Our reedswitch are gold-rhodium-plated, which allow direct connecting to SPS-systems.

2. Standard wiring diagram for switches, provided with connector:



3. Adjusting the switching points

The switchpoint should be adjusted on the scale of the flowswitch. Please notice that the switch point is always the shutdown point. That means the contact will open when the flow-rate is decreasing to the adjusted switchpoint. So the NO opens in case of an alarm.

To adjust the switching contacts an ohmmeter, continuity tester or similar tool is required.
(NO) connection: Pin 1 & 2, (SPDT) connection: Pin 1 & 3

Units without optical indication (N/L-models)

- Loosen the lock screw of the switch contact.
- Shift the switch contact until the arrow on the switch contact is in coincidence with the desired flow rate value on the range.
- Tighten the lock screw of the switch contact.

Units without optical indication (O-models)

1. Adjustment of the removed unit:

- Shift the switch housing from the centre of the adjustment range to the input side, until the contact closes.
- Shift the piston with a non-magnetic tool (e. g. a pencil) until the needle shows the desired flow rate (contact closed).
- Shift the switch housing slowly to the output side until the contact just opens.
At this point locate the switch housing with the lock screws.

2. Adjustment of the mounted unit:

- see 1. a)
- Open supply until the needle shows the minimal flow rate desired.
(contact closed)
- see 1. c)

4. Maintenance

The flowmeters are free of maintenance because of the few mechanical parts. For security reason we advice to check the flowmeters from time to time.

Barksdale

CONTROL PRODUCTS

Barksdale GmbH

Dorn-Assenheimer Strasse 27
D-61203 Reichelsheim / Germany

Tel.: +49 - 60 35 - 9 49-0
Fax: +49 - 60 35 - 9 49-111 and 9 49-113
e-mail: info@barksdale.de
www.barksdale.de

Art.-Nr.: 923-1939

Index I, 31.01.2019

Specifications are subject to
changes without notice.

5. Switch versions for hazardous locations

As option there is an intrinsically safe approved version for G and D environments according to ATEX regulations. These switches, marked with EEx ia label, must be operated with a certified switch amplifier according to the applicable regulations. Design conditions, approval data and instructions must be observed carefully. Installation and operation must be performed by trained personnel only.

Approval data: Approved for:  II 1 GD Ex ia IIB T6 Ga / Ex ia IIIC T100°C Da
Certificate-No.: ISSeP08ATEX016X/1

Electrical data for intrinsically safe application: $U_i = 28\text{ V}$ $C_i = 40\text{ pF}$
 $I_i = 50\text{ mA}$ $L_i = 4\text{ }\mu\text{H}$

All conductive parts that can become dangerously charged must be connected and fet into the equipotential bonding. Inside the device no explosive mixture (gas/air, dust/air or hybrids) may occur at any time. This is to be guaranteed by the operator.

6. Technical data:

Operating data	BFS-40-N	
Pressure	200 bar (MS), 300 bar (VA), 100 (MS with GL)	
Pressure drop	0,02 - 0,8 bar	
Temperatuer max.	100 °C	
Electrical data*		
Normally open	250 V - 3 A - 100 VA	
Change over**	250 V - 1,5 A - 50 VA	
Protection	IP65	
Materials	brass	1.4571
Housing	brass	1.4571
Float	brass	1.4571
Spring	1.4571	1.4571
Seals	Perbunan, Viton or EPDM	
Accuracy	±5% of FS	
Electrical connection acc. to DIN 43650 or with 1 m cable		

Operating data	BFS-40-O	
Pressure	200 bar (MS), 300 bar (VA)	
Pressure drop	0,02 - 0,8 bar	
Temperatuer max.	100 °C	
Electrical data*		
Normally open	250 V - 3 A - 100 VA	
Change over**	250 V - 1,5 A - 50 VA	
Protection	IP65	
Materials	brass	1.4571
Housing	brass	1.4571
Float	brass	1.4571
Spring	1.4571	1.4571
Seals	Perbunan, Viton or EPDM	
Display housing	Makrolon	
Accuracy	±5 % of FS	
Electrical connection acc. to DIN 43650 or with 1 m cable		

* Data only for application in non explosive atmosphere


** Minimum load: 3 VA

Contact rating for SPS-applications: 200 V, 1 A, 20 VA (Please request)

Dimensions (in mm)

BFS-40-N

(G)	G 1/4	G 1/2	G 3/4	G 1	1 1/4	1 1/2
(hex)	27	27	34	40	40/50	60
(Ø)	30	30	40	40	40/50	60
(W)	71	71	76	76	76/81	82
(D)	14	14/16	18	19	21	24
(L)	130	148	152	156	200	200
Weight (g)	850	900	1400	1100	2750/ 3000	3800

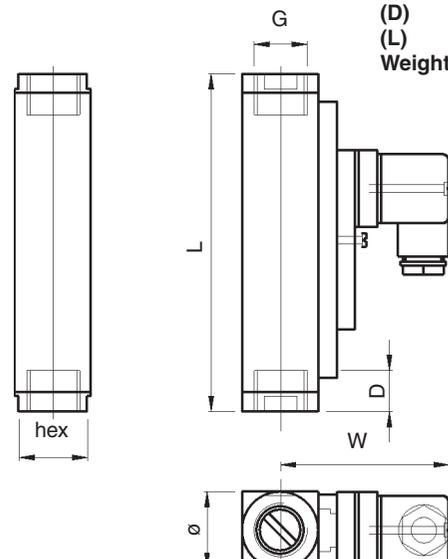

BFS-40-O

(G)	G 1/4	G 1/2	G 3/4	G 1	1 1/4	1 1/2
(hex)	27	27	27/34	40	40/50	60
(Ø)	30	30	30/40	40	40/50	60
(Ø1)	47	47	47/57	57	57/67	77
(W)	71	71	71/76	76	76/81	82
(D)	14	14	16/18	19	21	24
(L)	130	130/149	148/152	156	200	200
Weight (g)	900	900/950	950/1450	1150	2800/ 3050	3850

